

Manufactured in France 1 temperature cabinet Small size **Premium Pack**



Flush fitting maturing cabinet, for wine ageing

Technical Specifications

Equipment	Capacity	38 bottles maximum*	
Standard shelf	Temperature	•Default setup temperature: 12°C/54°F •Electronic regulation from 5 to 20°C / 41 to 68°F	
Sliding shelf ACMSCV2 8 bottles	Design	 3 doors options: technical solid door, full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle Reversible doors (only on glass and full glass doors) Lock 	 LED screen with touch buttons Inner lighting (3 lighting options: permanent, open door, disabled) Amber screen display
Equipment	Accessories	 4 sliding shelves equiped with «Mains du Sommelier» 	•1 EuroCave key ring
Optional shelves	Equipment	Charcoal filter (with counter) Humidity cassette Low emission glasses and argon gas between 2 panes (only on glass and full glass doors)	 •4 adjustable feet •Condensate drip tray at the back
Storage shelf Presentation kit AXLNH AOPRES 50 bottles 9 bottles	Regulation	 Electronic regulation Display of the real temperature inside the cabinet Hygrometry display 	 Visual alarms in case of dysfunction (open door, sensor fault, temperature alarm, charcoal filter, threshold humidity) Automatic defrost
	Technologies	Cold production: Cords: Hot production: Hot release: Inner material: Exterior coating material:	Static cooling and air fan CE/UK/AU/CH/ US/JA/C6/CN Heating element Automatic Threshold : adjustable Aluminium HDF (High Density Fiber)
		Insulation type:	PU foam



General features

	Full Glass door / Glass door	Technical solid door
Empty wine cabinet net weight (kg)	46	41
Equipped cabinet net weight (kg)	56	51
Gross weight packaged (kg)	69	64
Dimensions H x W x D (mm)	818/834 x 594 x 555**	836/852 x 594 x 550**
Dimensions packaged (mm)	1000 x 620 x 620	1000 x 620 x 620
Colour	Nero - RAL 9005	Nero - RAL 9005

**Without the handle . No rear stop needed for this model


Energy efficiency & Consumption

Cords	230V-50Hz (R600a)		115V-60Hz (R600a)	
Type of door	Full Glass door / Glass door	Technical solid door	Full Glass door / Glass door	Technical solid door
Energy efficiency class	G	G	/	/
Annual energy consumption AEC (Kwh/year)	157	128	172	172
Sound emission (dB(A))	41	41	41	41
Sound emission Class	С	С	С	С
Ambient operating temperature (°C/°F)	0-35/ 32-95	0-30/ 32-86	0-35/ 32-95	0-30/ 32-86
Useful volume (litres)	112			


Compact, in a few words...

Wine that's ready to drink whenever you want it!

In flush-fitted version, wine cabinets in the Compact collection fit perfectly into your kitchen as their dimensions are determined by kitchen designers. In free-standing version, they meet your space constraints and easily fit into your living room or cellar.

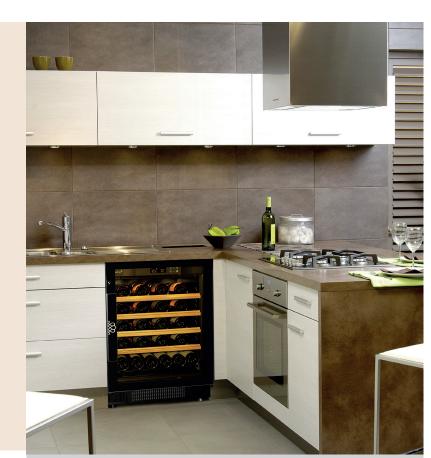







Compac

· LED screen with touch buttons

·Amber screen display

1 EuroCave key ring

·4 adjustable feet

Automatic defrost

Heating element Automatic

Aluminium

PU foam

Threshold : adjustable

HDF (High Density Fiber)

Static cooling and air fan CE/UK/AU/CH/ US/JA/C6/CN

· Condensate drip tray at the back

·Visual alarms in case of dysfunction (open door, sensor fault, temperature alarm, charcoal filter, threshold humidity)

• Inner lighting (3 lighting options: permanent, open door, disabled)

V-059V3



Flush fitting maturing cabinet, for wine ageing

Technical Specifications

47 bottles maximum*

Capacity

nent	cupucity	The bottles maximum	
dard shelves ~	Tempera	•Default setup temperature: 12°C/ •Electronic regulation from 5 to 20	
rg shelf NSCV2 ottles	Design	 3 doors options: technical solid door, full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle Reversible doors (only on glass and full glass doors) Lock 	LED screen Inner lightir permanent Amber scre
nent Y	Accesso	ries • 1 sliding shelf equiped with «Mains du Sommelier» and 1 storage shelf	•1 EuroCave
tation kit PRES	Equipme	 Charcoal filter (with counter) Humidity cassette Low emission glasses and argon gas between 2 panes (only on glass and full glass doors) 	•4 adjustable •Condensate
ttles	Regulati	 • Electronic regulation • Display of the real temperature inside the cabinet • Hygrometry display 	- Visual alarms (open door, s temperature filter, thresho - Automatic do
	Technolo	ogies Cold production: Cords: Hot production: Hot release:	Static cooling CE/UK/AU/CH Heating elem Automatic

Inner material: **Exterior coating material:** Insulation type:

*Traditional Bordeaux bottles

Equipment	
Standard shelves	~



ACM

Equipme Option



resenta AOPI 9 bot

General features

	Full Glass door / Glass door	Technical solid door
Empty wine cabinet net weight (kg)	46	41
Equipped cabinet net weight (kg)	50	45
Gross weight packaged (kg)	63	58
Dimensions H x W x D (mm)	818/834 x 594 x 555**	836/852 x 594 x 550**
Dimensions packaged (mm)	1000 × 620 × 620	1000 x 620 x 620
Colour	Nero - RAL 9005	Nero - RAL 9005

**Without the handle . No rear stop needed for this model

Energy efficiency & Consumption

Cords	230V-50Hz (R600a)		115V-60Hz (R600a)	
Type of door	Full Glass door / Glass door	Technical solid door	Full Glass door / Glass door	Technical solid door
Energy efficiency class	G	G	/	/
Annual energy consumption AEC (Kwh/year)	157	128	172	172
Sound emission (dB(A))	41	41	41	41
Sound emission Class	С	С	С	С
Ambient operating temperature (°C/°F)	0-35/ 32-95	0-30/ 32-86	0-35/ 32-95	0-30/ 32-86
Useful volume (litres)	112			

Compact, in a few words...

Wine that's ready to drink whenever you want it!

In flush-fitted version, wine cabinets in the Compact collection fit perfectly into your kitchen as their dimensions are determined by kitchen designers. In free-standing version, they meet your space constraints and easily fit into your living room or cellar.

